

# Systeme d'exploitation miniere GPU pour machine miniere P106

## NewMagic GPU Mining System P106




One-Stop solution of digital currency mining  
 Professional PCB design specialized for mining  
 Suitable for various digital currencies such as ETH, ZEC, XMR  
 Excellent hash power per power consumption  
 Maximize the efficiency and productivity of mining process

<b>Graphics Card Hash Rate</b>	<b>8 x GPU Mining Card P106-100</b> <b>ETH ~ 200MH/s ±5% (Power ~1000W)</b> <b>ZEC ~ 2500Sol/s ±5% (Power ~1050W)</b> <b>XMR ~ 4400H/s ±5% (Power ~ 700W)</b>
Power Connector	7 x 6 Pin 12V
PCI-E Slot	9 x PCI-E x16
System Cooler	10 x 9cm 4500rpm coolers (5 x inflow, 5 x outflow)
Power Supply Requirement	1600W (PSU Optional)
CPU	Intel® Celeron® Mobile Processor series.
Memory	1 x 4GB DDR3 DRAM
Storage	1 x 64GB mSATA SSD
Display Output	1 x HDMI
Ethernet	1 x Giga LAN
USB Slot	2 x USB2.0
OS	Windows 10 64Bit (Optional)
Dimensions	530x320x160mm (Outer Ctn: 640x430x270mm)
Weight	N.W. 11kg, PSU 2.2kg, G.W. 13kg, w/PSU 15kg



### Motherboard Layout Illustration

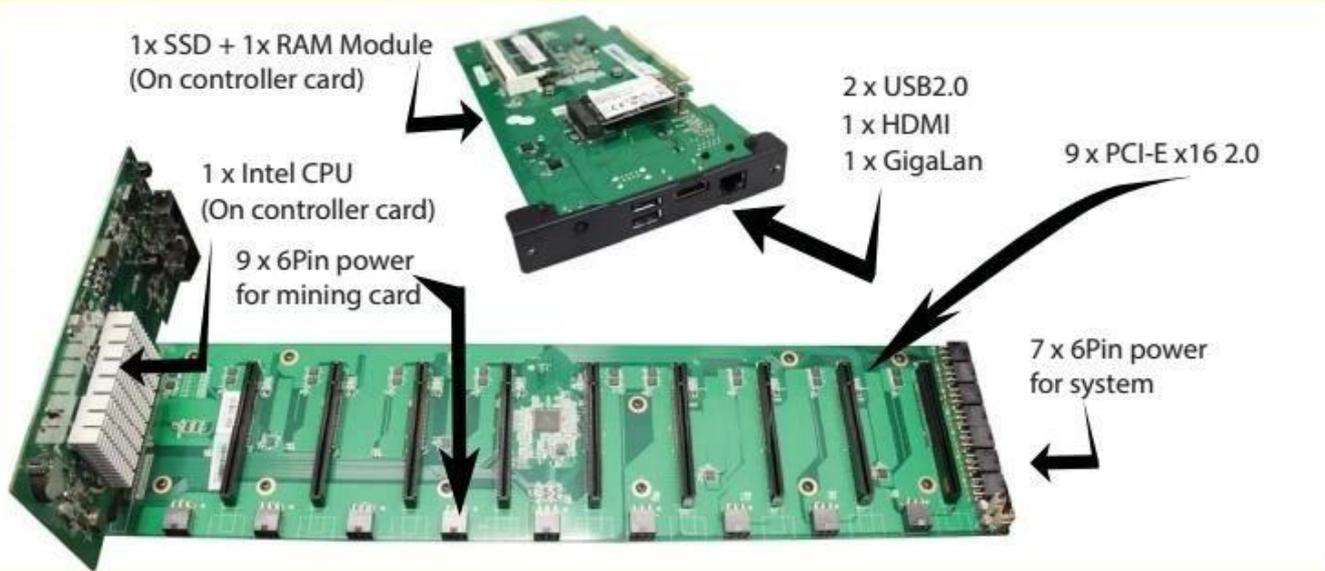





## GPU Mining Card P106-100


Special designed GPU and circuit board for mining purpose  
 Maximized GPU and memory clocks setting  
 Distinctive mining performance on ZEC (~2500Sol/s) and XMR (~4400H/s)  
 Large heatsink for heat dissipation  
 Low power consumption compared with other market solutions  
 Balanced performance and power to maximize mining return

## Comparison with DIY machine

<i>Feature</i>	<i>NewMagic Mining System P106</i>	<i>DIY Machine</i>
Hash Rate	High computing power, 8 x P106-100	Low computing power, 6 x RX470
Power Consumption	Energy saving. Adopt low power mobile CPU and low power design GPU with low TDP	Energy wasted. Regular desktop CPU and regular design GPU with high TDP
Cooling System	5*inflow + 5*outflow high power system fans with excellent air ventilation design. Easy for maintenese	Individual GPU cooler, higher power requirement, trouble handling for cooler failure and lose computing power
Management	With sturdy enclosure, dust control and air ventilation maximized	Open system, dusty and trouble to clean, dispersed ventilation

## System Overview

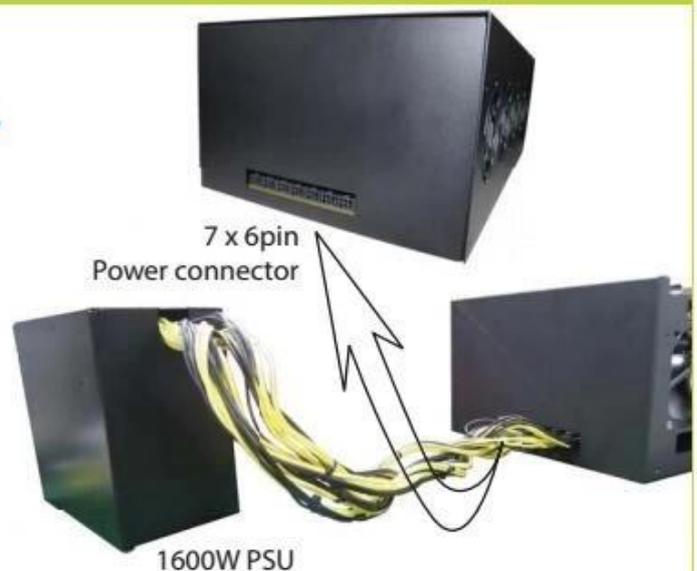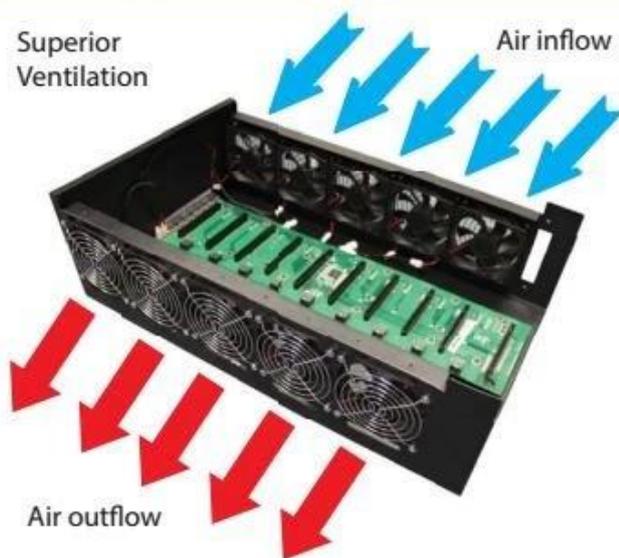

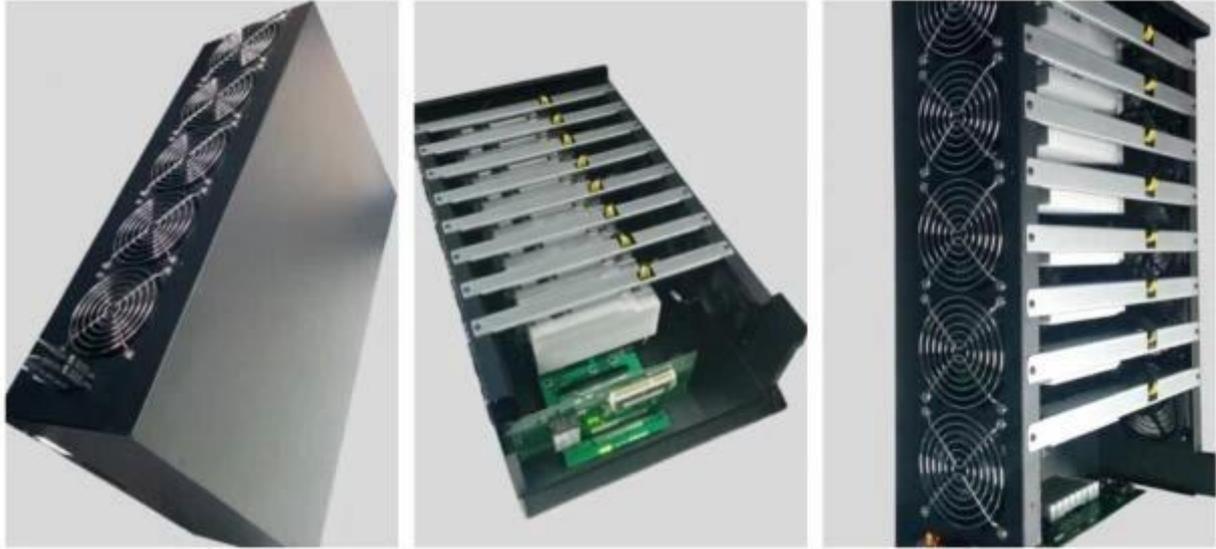

**Partagez d'autres produits miniers avec  
VOUS :**

**[Carte mère de machine de mineur](#), [Carte graphique de machine de mineur](#), [Adaptateur secteur pour machine de mineur](#)**