


Specifications

| System | | |
|------------------|--|--|
| Processor | Supports 4th Gen Intel® Core™ i7/i5/i3/ Pentium® / Celeron® processors for LGA 1150 socket | |
| Chipset | Intel® H81 Express Chipset | |
| Memory Support | Support 2*DDR3 DIMMs 1066/1333/1600 MHz, up to 8GE - Supports Dual-Channel mode - Supports non-ECC, un-buffered memory | |
| Onboard Graphics | 1 VGA Port 1 HDMI Port | |
| USB | 4 USB 3.0 (Back panel 2 ports, 2 ports available through the internal USB connectors 6 USB 2.0 (Back panel 2 ports, 4 ports available through the internal USB connectors) | |
| LAN | Onboard Realtek® RTL8111G Gigabit LAN controller | |
| Audio | Onboard Realtek® 662 6-channel HD Audio Codec Front Panel audio-out,mic-in jack | |
| SATA | 4 SATA 3Gb/s Ports | |
| Slots | 1 PCI Express x16 5 PCI Express x1 | |

| ack Panel | |
|-------------------|--|
| | 1 PS2 Mouse/Keyboard Port 1 VGA Port 1 HDMI Port 2 USB 3.0 Ports 2 USB 2.0 Ports 1 LAN Port 1 Audio Jacks(Line in / Line Ourt / Mic in) |
| Onaboard Pinheade | rs / Connectors |
| | 2 USB2.0 Pinheaders , for 4*USB 2.0 Ports 1 USB3.0 Pinheader , for 2*USB 3.0 Ports 1 COM Pinheader 1 DEBUG Pinheader 1 Front panel Audio Header 1 Front panel header 1 PWR IN Connector 1 PVIR IN Connector 1 PCIE 12V Connector 1 24-pin ATX Power Connector 1 8-pin ATX 12V Power Connector 1 CLR_COMS Pin Header 1 SPEAK Pin Header |
| Form Factor | |
| | Micro-ATX (28cm X 21.8cm) 7 mounting h |





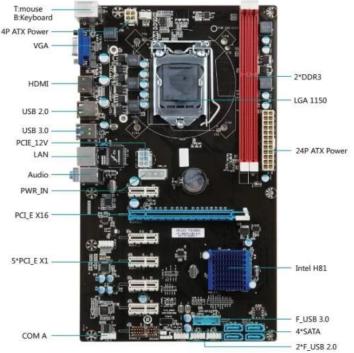

| Accessories | |
|---------------------|-------------------------|
| 2 X SATA data cable | 1 X User Manual |
| 1 X I/O Backboard | 1 X Drives installed CD |



Support 16PCS Graphic Card



Specification

Intel® H81 Express Chipset
Supports 4th Gen Intel® Core™ i7/i5/i3 processors
for LGA 1150 socket

Support 2*DDR3 1600MHz/1333MHz/1066MHz内存

- 1 VGA Port, 1 HDMI Port
- 4 SATA 3Gb/s Ports

Onboard Realtek® RTL8111G Gigabit LAN controller

- 1 PCI Express x16 Slot
- 5 PCI Express x1 Slots
- 4 USB 3.0 (Back panel 2 ports, 2 ports available through the internal USB connectors)
- 6 USB 2.0 (Back panel 2 ports, 4 ports available through the internal USB connectors

Rear Panel

The rear panel provides the following connectors





Support 16PCS Graphic Card