

# Хешрейт Bitmain ANTMiner T17 40TH/S с монетой Power BTC/BCH

Model No.:	240-Aa
Crypto Algorithm/Coins	SHA256/BTC/BCH
Hashrate, TH/s	40.00
Reference power on wall, Watt	2200
Reference power efficiency on wall @25°C, J/TH	55.00

Detailed Characteristics	Value		
	Min	Typ	Max
<b>Hashrate &amp; Power</b>			
Hashrate, TH/s		40.00	40.45
Power efficiency on wall @25°C J/TH	55.00		58.85
Power efficiency on wall @40°C J/TH	58.26		62.34
Power on wall, Watt (1-1)	2200		2522
Power supply AC input voltage, Volt (1-2)	200	220	240
Power supply AC input current, Amp (1-3)		10.00	12.61
Power supply Input AC Frequency Range, Hz	47	50	63
<b>Hardware Configuration</b>			
Quantity of hash chips	90		
Quantity of hash boards	3		
Networking connection mode	RJ45 Ethernet 10/100M		
Miner Size (Length*Width*Height, w/o package).mm(2-1)	298.2*178.0*296.6		
Net weight, kg (2-2)	9.73		
Noise, dBA @25°C (2-3)			82
<b>Environment Requirements</b>			
Operation temperature,°C	0	25	40
Storage temperature,°C	-20	25	70
Operation humidity, RH(no condensation)	10%		90%

# ANTMINER T17

## ESTABLISH YOUR MINING PRESENCE



Power Efficiency  
**55J/TH**



Hash Rate  
**40TH/s**




Second-Generation  
**7nm Chip**



## New Generation Cutting Edge Technology

Equipped with Bitmain's 2nd Generation 7nm chip process and utilizing the world's leading TSMC FinFET technology.

Global optimization is achieved through an enhanced chip performance improving computational performance.

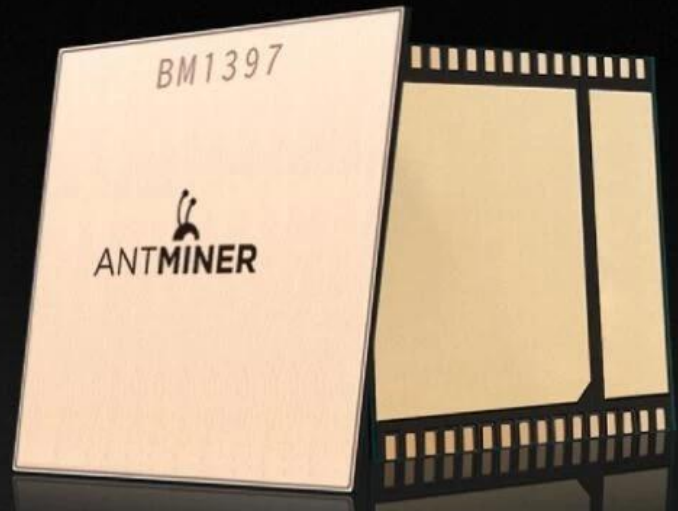

## Hashing Power of 40 TH/s

The T17's optimized structure delivers a continuous amount of improved hashing power achieving new heights.





## An Entirely New Design, Added Safety

A new generation design, effectively prevents dust and improves the stability and safety of the miner.

## Improved Efficiency. Stable Operation

The new APW9 power supply ensures miners a stable operation, saving electricity costs.

