Электростанция Ecoflow 600 Вт, аккумуляторная батарея с домашней солнечной системой



Fire Prevented

94-V0 ABS case, which is the highest fire prevention grade, and environment-friendly, more safe for end user

Specifications

| Battery built-in | High quality lithium battery |
|---------------------------|--|
| Battery capacity | 520Wh (11.1V , 46.8AH) |
| Input recharging | DC15V/6.0A |
| Solar panel recharging | DC5521 13V~22V/6.0A |
| Fully recharged time | DC:8~9 hours |
| DC output | 1 X USB 5V~9V/2A Qualcomm QUICK Charge3.0 port 1 X type-c 5V~9V/2A Qualcomm QUICK Charge3.0 port 2 X USB 5V/3.1A (MAX) 4x5521 DC Output:9~12.6V/10A(12A Max totall) |
| AC output | 2x AC pure sine wave output |
| AC continous power output | 500W |
| AC peak power output | 1000W |
| Operation temperature | -10℃-40℃ |
| Lifecycle | >600 times |
| Product protection | a.Short circuit protection b.Overcurrent protection c.Overvoltage protection d.Undervoltage protection e.Overload protection f.Over temperature protection |
| Package include | 1 x portable solar generator 1 x power adapter 1 x AC line 1 x user manual 1x Car charger |

Multifunctional Portable Outdoor Power Pack PPS X600W

Easy Power, Safe Power

600W/520WH




Multifunctional Portable Outdoor Power Pack PPS X600W

Easy Power, Safe Power


600W/520WH



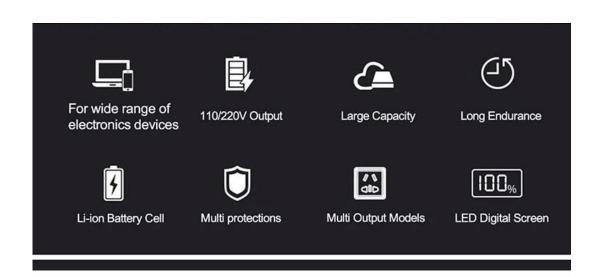

Wide range, More applications

110V/220V output.suitable for all electronic devices below 600W

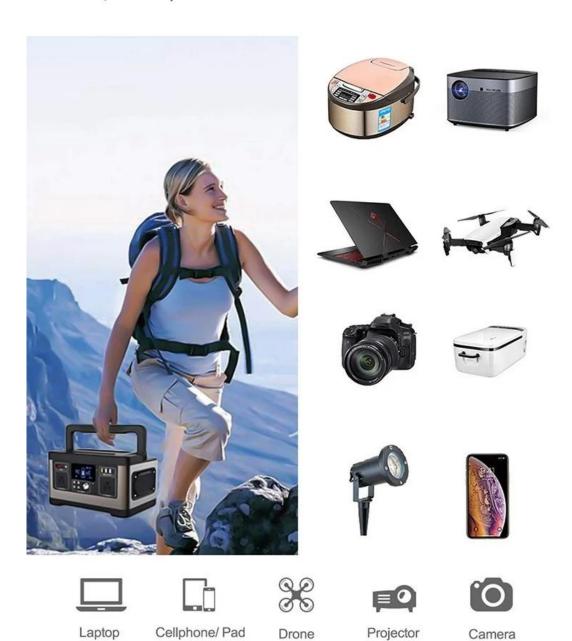

Output Ports Description

More outputs models, suitable for different types of electronic products DC/ USB/ Type-C/ AC



- 1 Type-C output 2 DC output
- 3 Power On/ Off 4 AC Switch Button
- USB output
 6 AC output
- 7 Input
- (3) LED Screen

How To Charge

Could charge from solar charger, car port and AC outlet









What if the PPS X600W is out of power outdoors? It can be recharged by solar panel also







